

























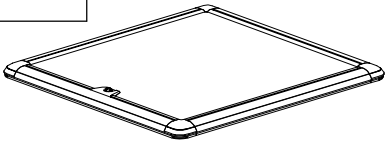


UpStoneEvolve




INSTALLATION INSTRUCTIONS K403

A  1X	B  1X	C  1X	D  2X
E  1X	F  4X	G M8x25mm  4X	H M8 x16 Stainless Steel Washer  6X
I  2X	J M8 Nylock  4X	K M8 Stainless Steel Spring Washer  2X	L  2X
M  2X	N  2X	O  2X	P M6x18  12X
Q M6x13mm Zinc  12X	R M6x10mm  8X	S  4X	T  4X
U M10x24mm  4X	V M8 x16 Zinc Washer  4X	W RH  1X	X LH  1X
Y M5 Cable Bolt, Washer & Dome Nut  2X	Z  2X	AA  2X	


Note 1: If at any stage of installation you find your sportlid to be an unacceptable fit please contact the manufacturer before continuing.

Note 2: If required, use Under Rail Bed Liner only. **NOT FOR USE WITH OVER RAIL BED LINER!**




Tools Required:

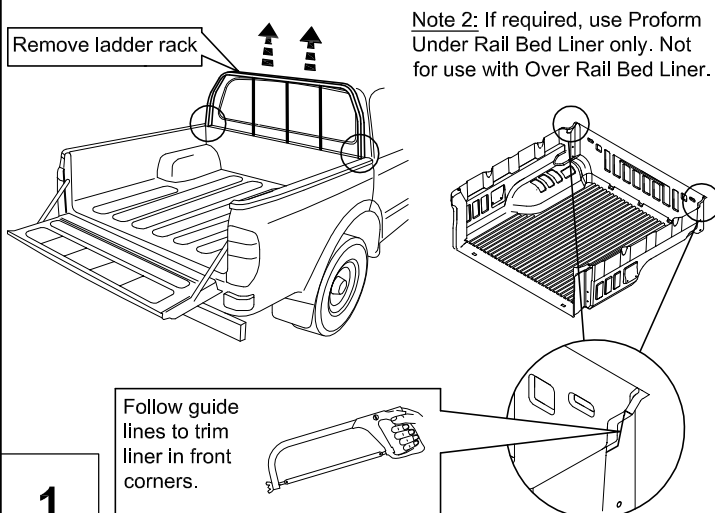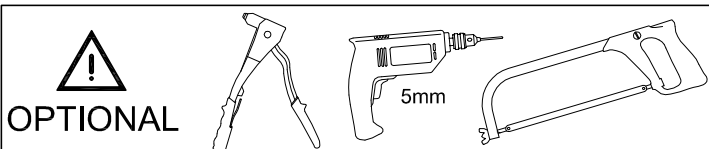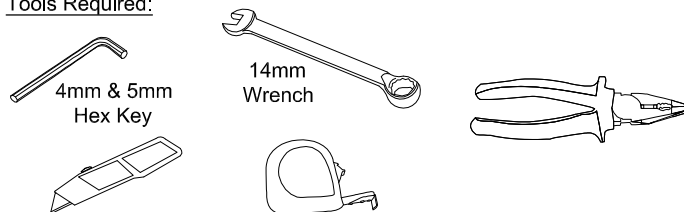

1

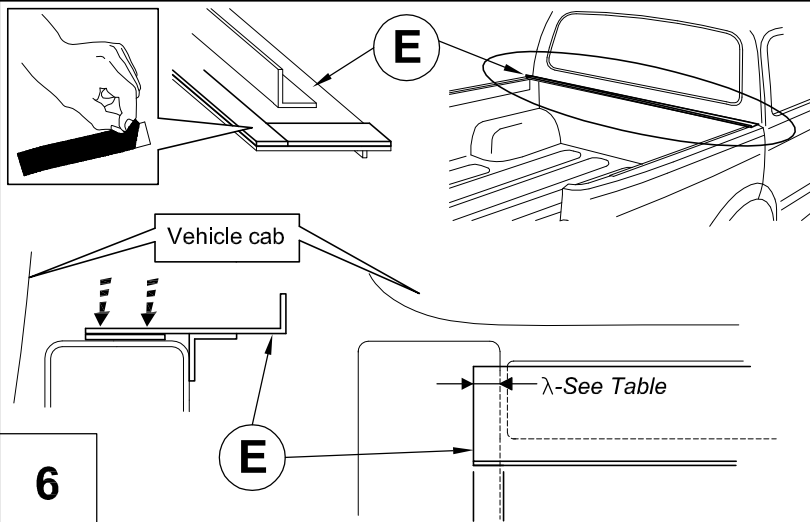


Vehicle Model	λ
Toyota Hilux Double Cab 2005 N25S, N25T	23mm
Isuzu D-Max Double & Extra Cab 2012 ATFS, ATFR	28mm




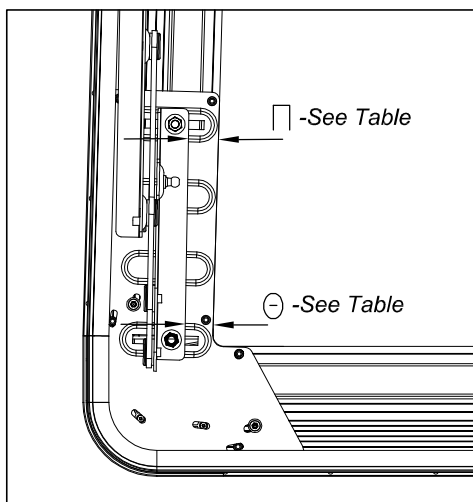
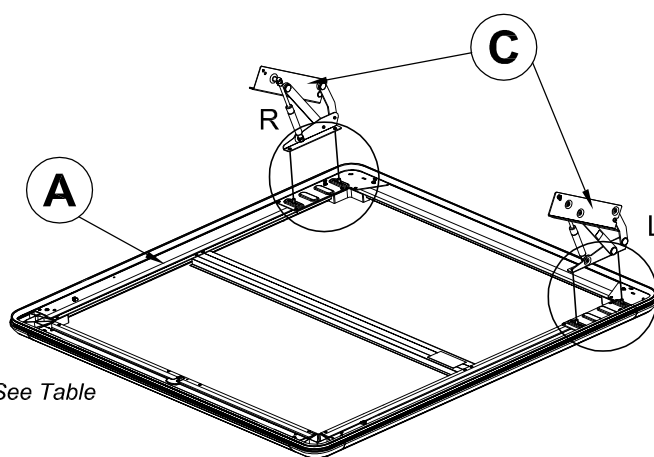
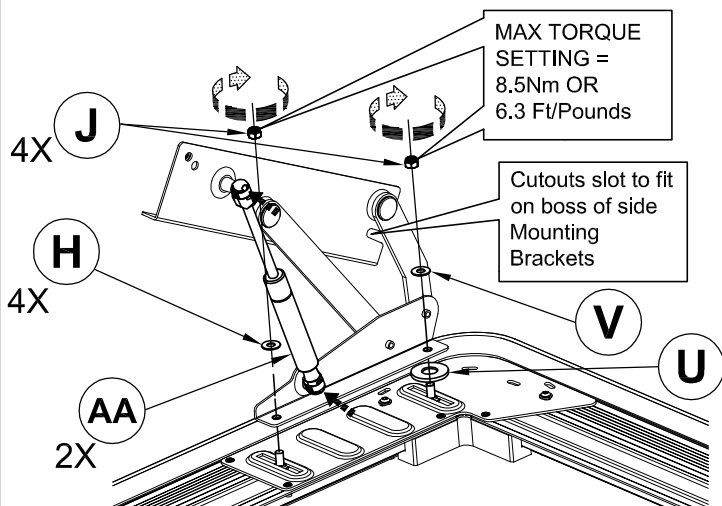



Vehicle Model	Π	Θ	Σ
Toyota Hilux Double Cab 2005 N25S, N25T	31mm	31mm	-
Isuzu D-Max Double & Extra Cab 2012 ATFS, ATFR	26mm	29mm	-

7

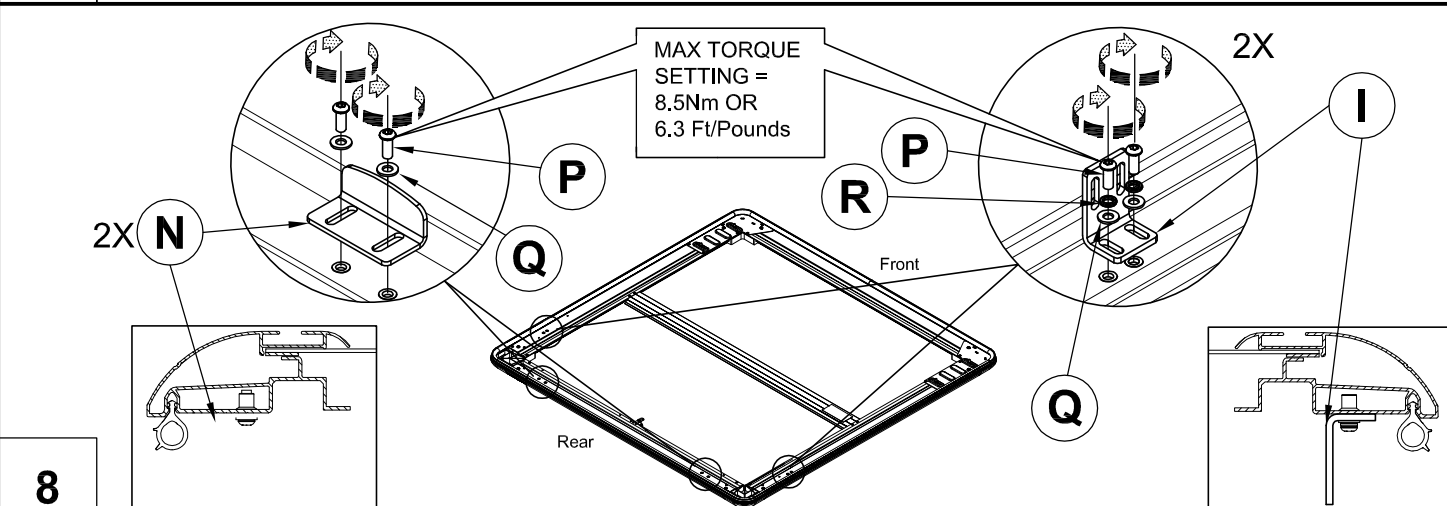


8

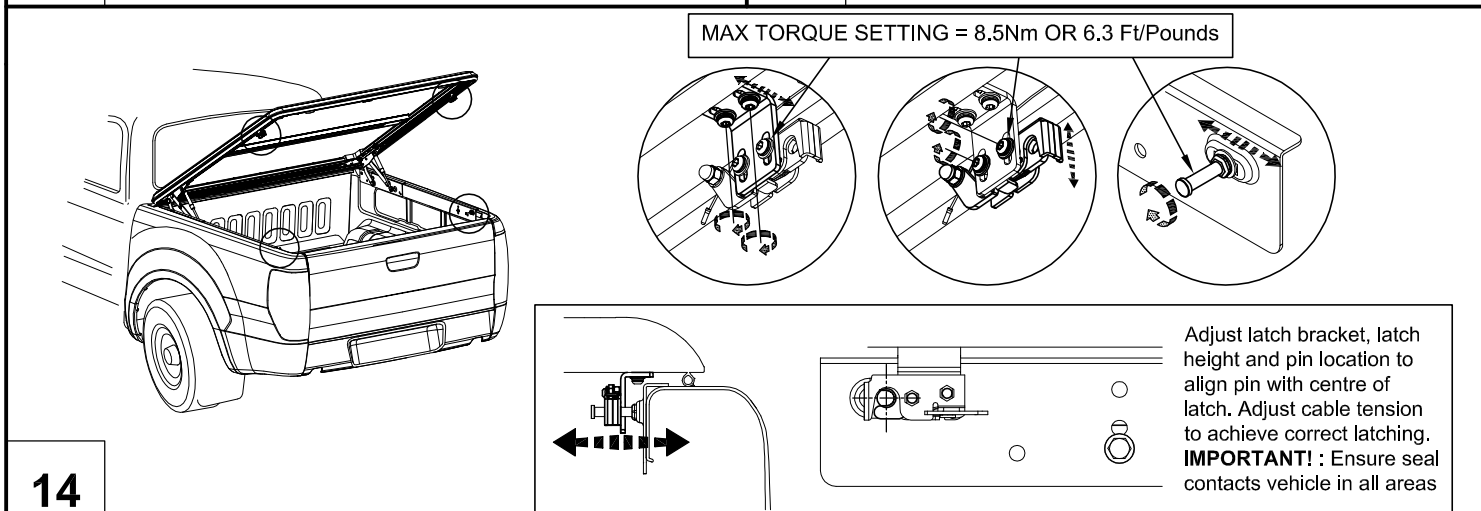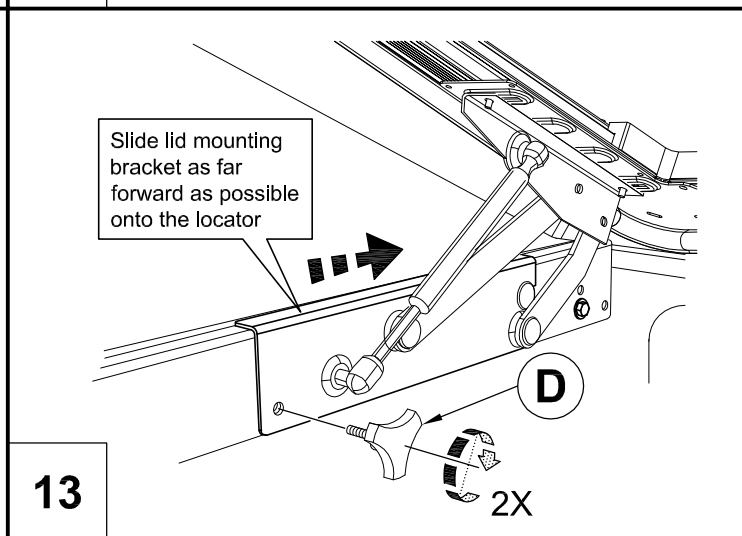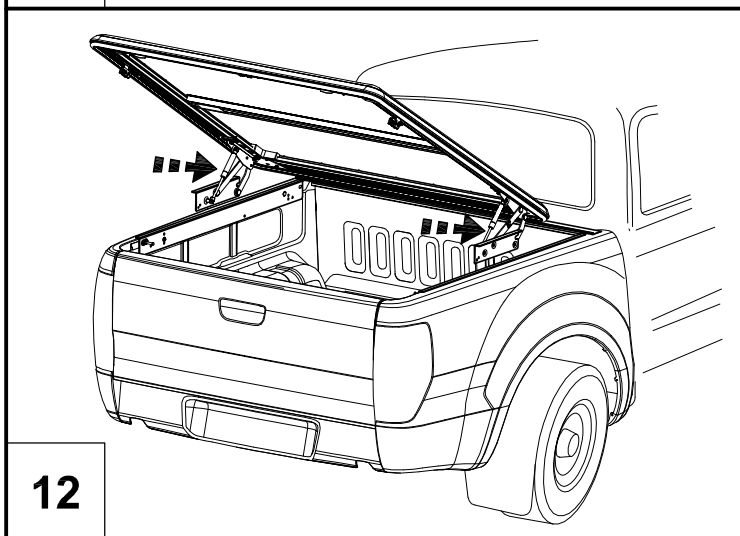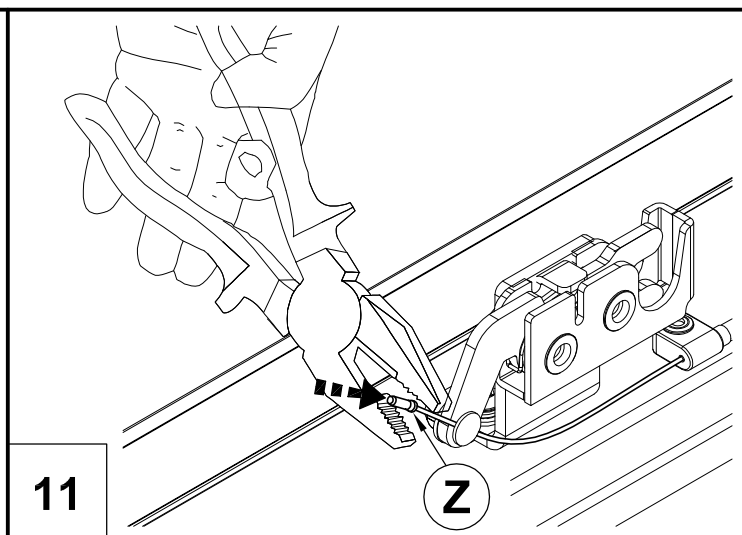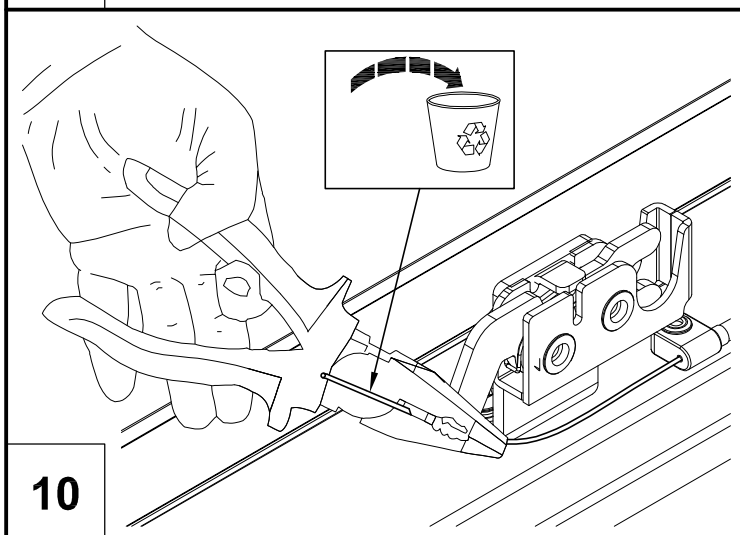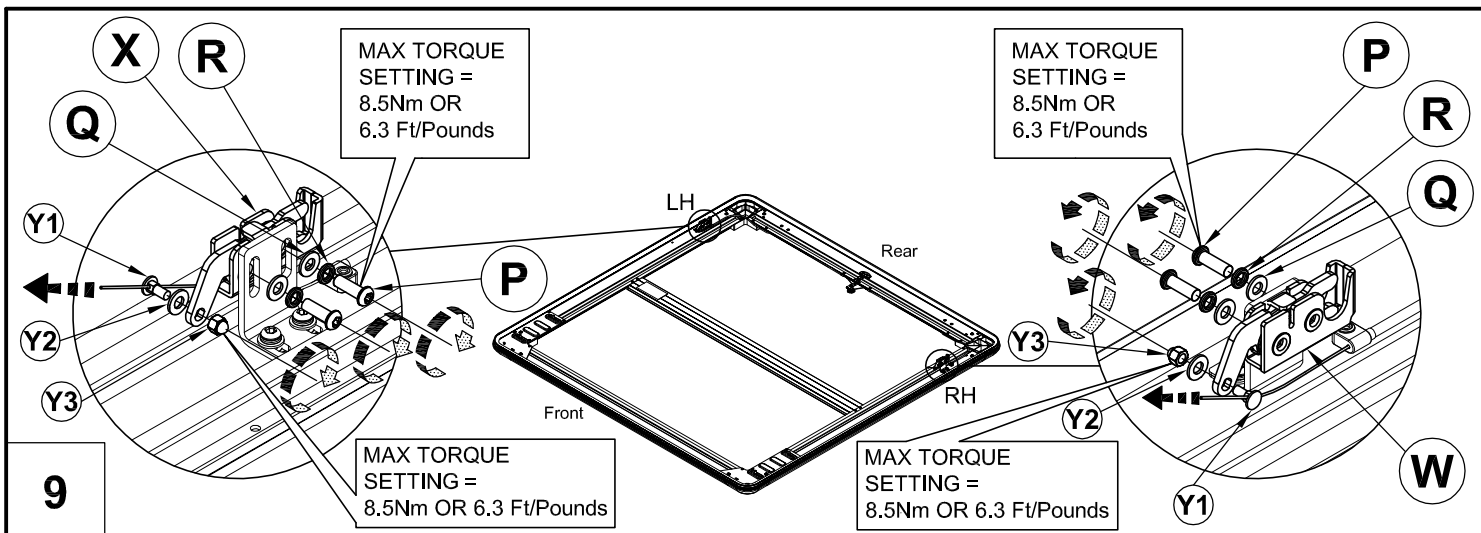


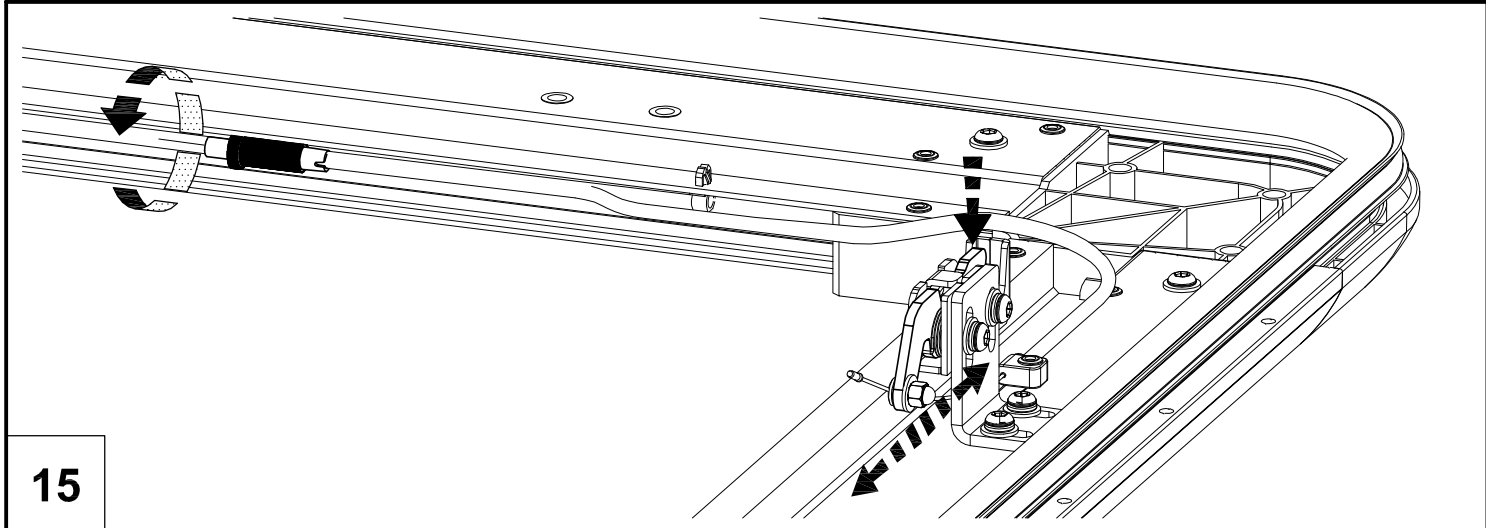

15

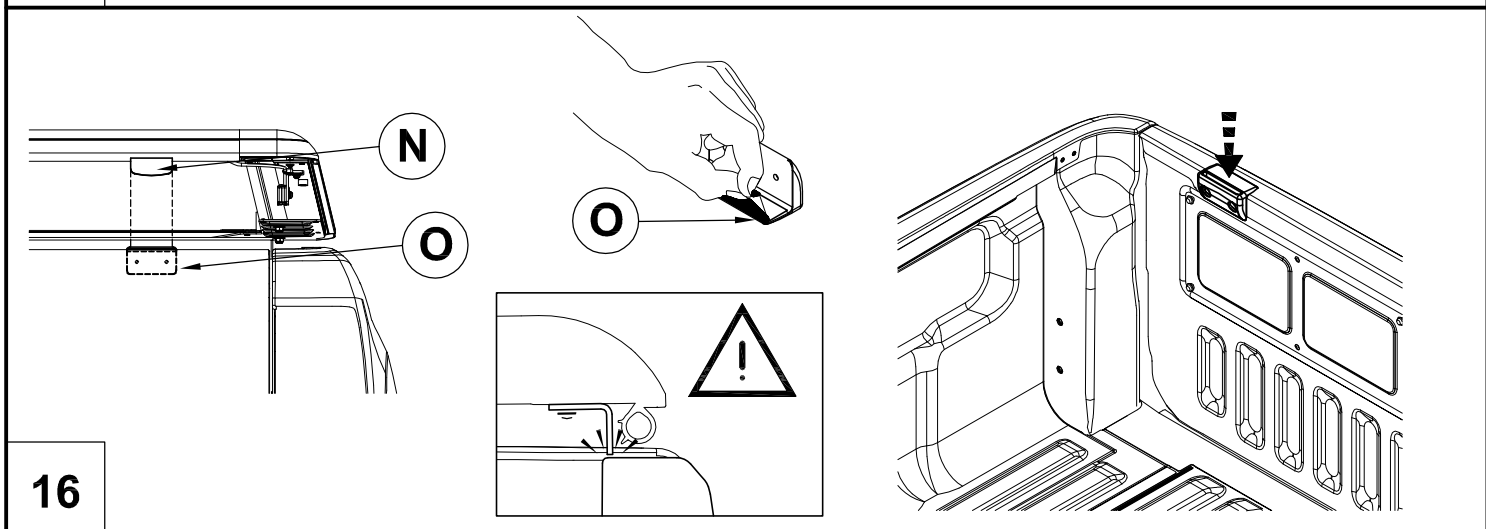


16

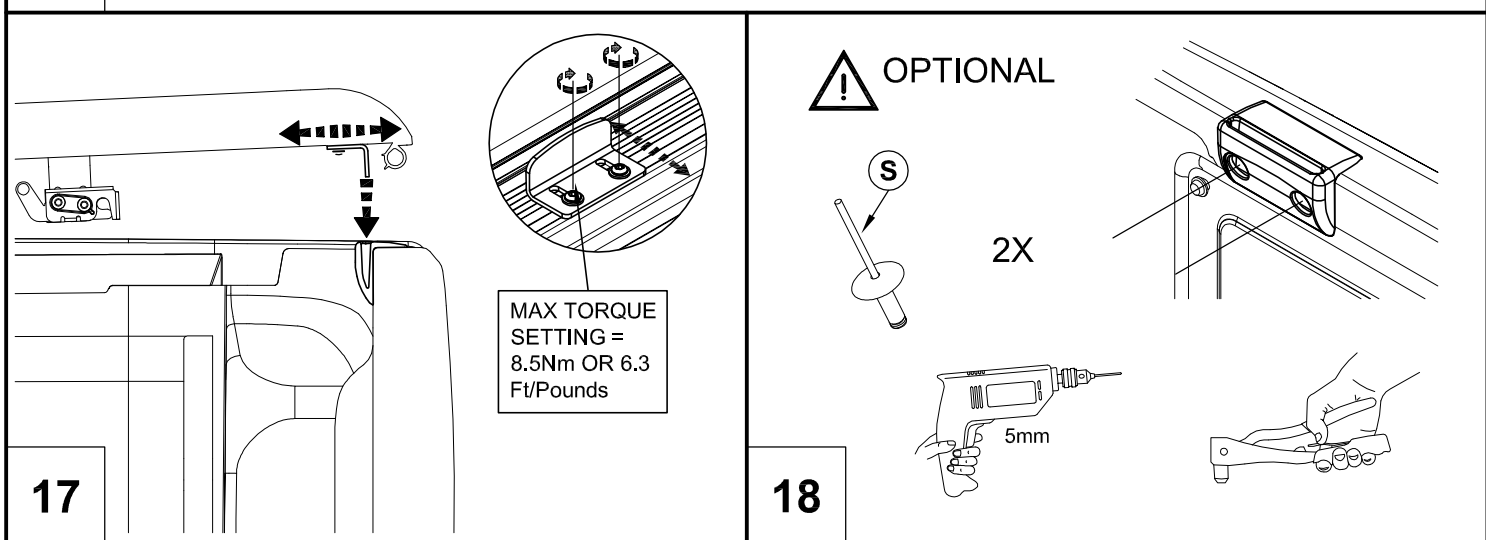


17



18

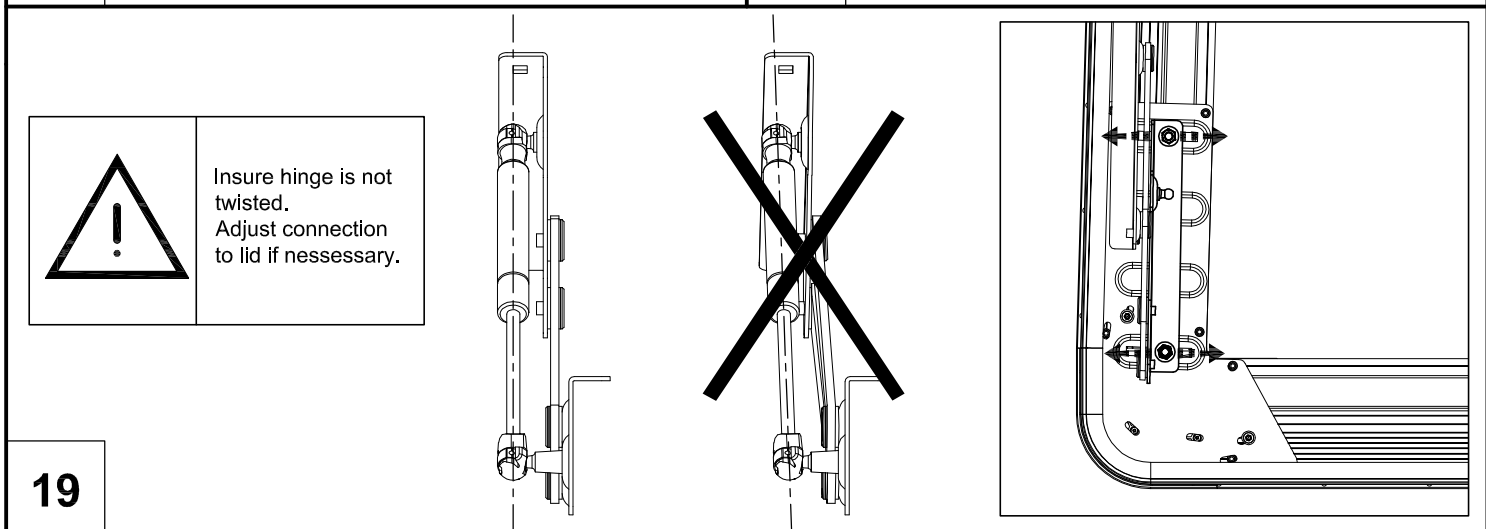

19

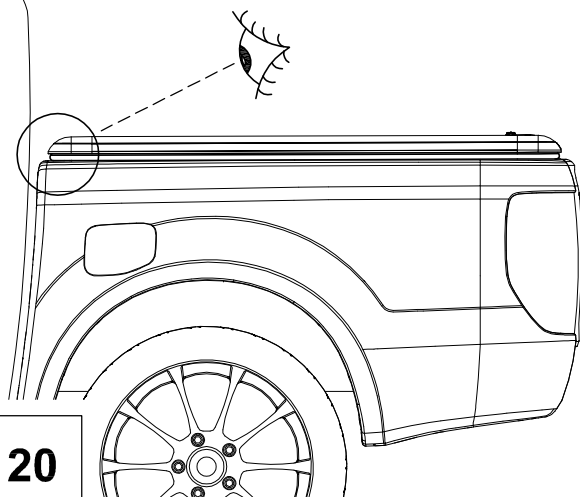

20

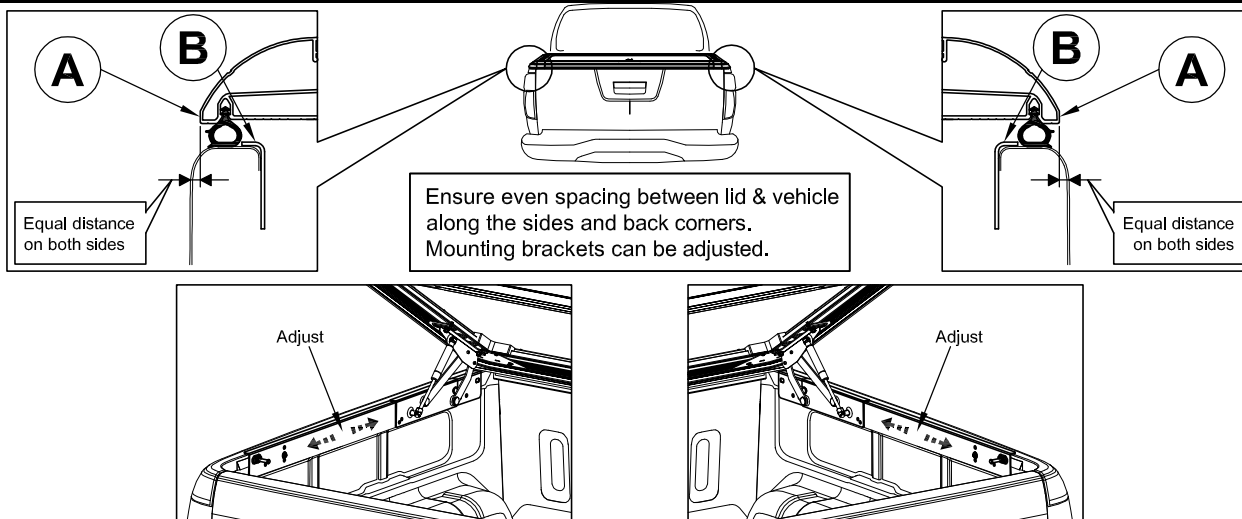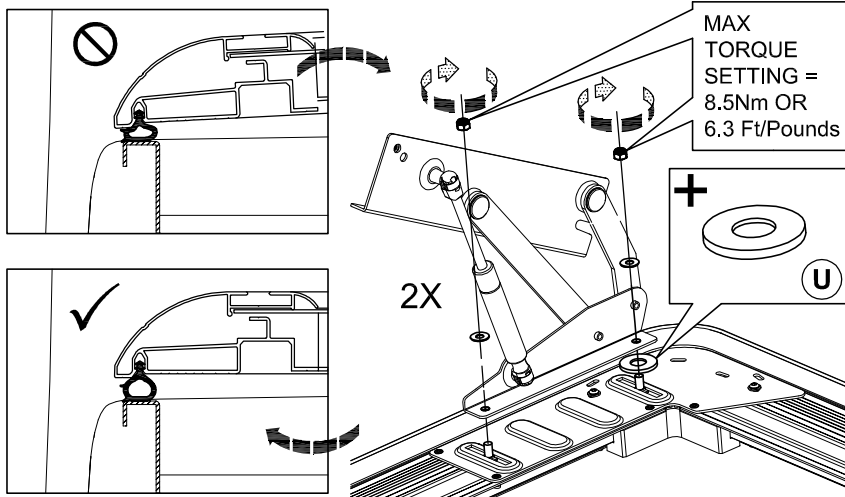

21

After installation carefully and thoroughly clean all debris from the inside of the cargo box.
Retain these instructions for future reference



CAUTION!

- NEVER allow people or animals under the closed cover
- Do not place unsealed solvents or chemicals under the cover
- Do not stand or place heavy objects on the cover
- Do not open lid when under load.
- Close the cover before operating the vehicle
- Do not allow oil, solvents or chemicals to contact the cover
- Clean only with a mild detergent and water solution