









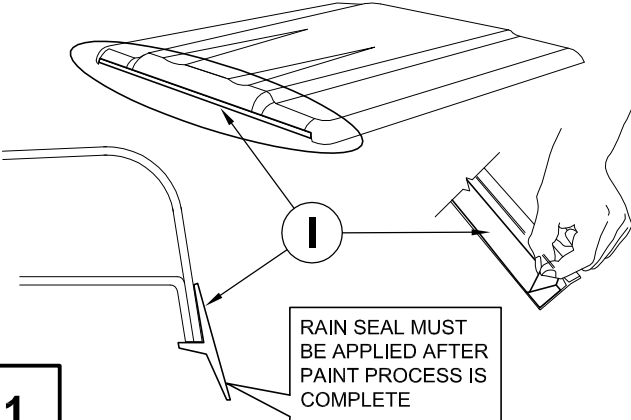
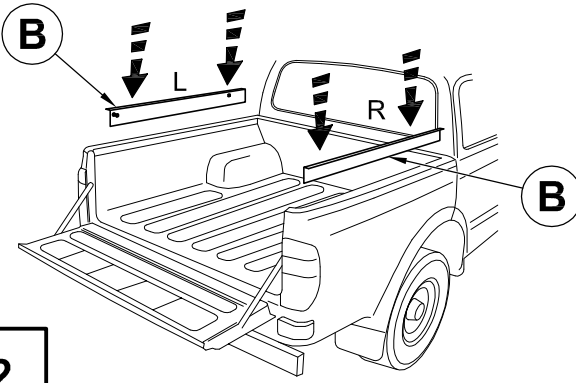
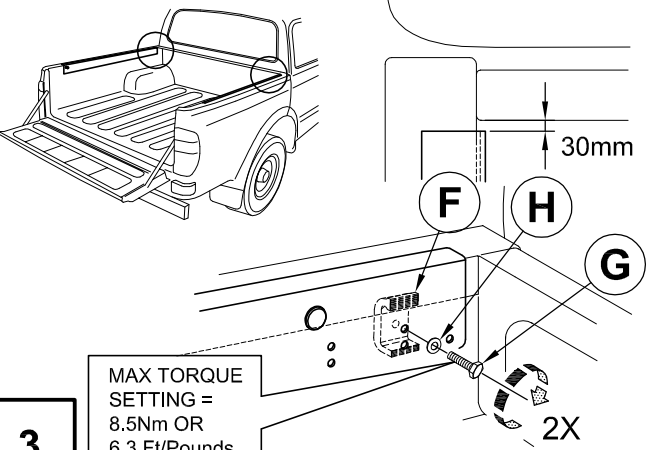









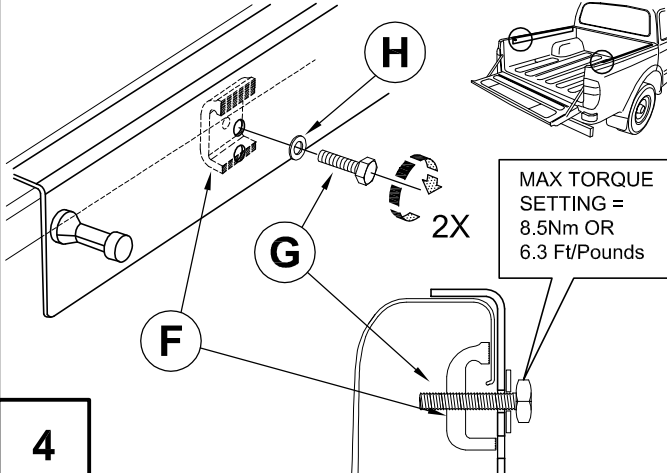


K122-Volkswagen-Amarok-2010-General Use-DC-SL1

A		B		C		D	
	1X		1X		1X		2X
E		F		G		H	
	1X		4X		M8x25mm 4X		8X
I		J  4X Sportlid for use with Proform Under Rail liners only					
	1X						

1	 RAIN SEAL MUST BE APPLIED AFTER PAINT PROCESS IS COMPLETE		2		
3	 MAX TORQUE SETTING = 8.5Nm OR 6.3 Ft/Pounds		4	 MAX TORQUE SETTING = 8.5Nm OR 6.3 Ft/Pounds	

Fitting Kit Number	Manufacturer	Model Type	Year	Customer	Cab Size	SL1 or SL2	Revision	Date	Page
IDFK122	Volkswagen	Amarok	2010	GENERAL USE	DC	SL1	2	01-02-11	1 of 2

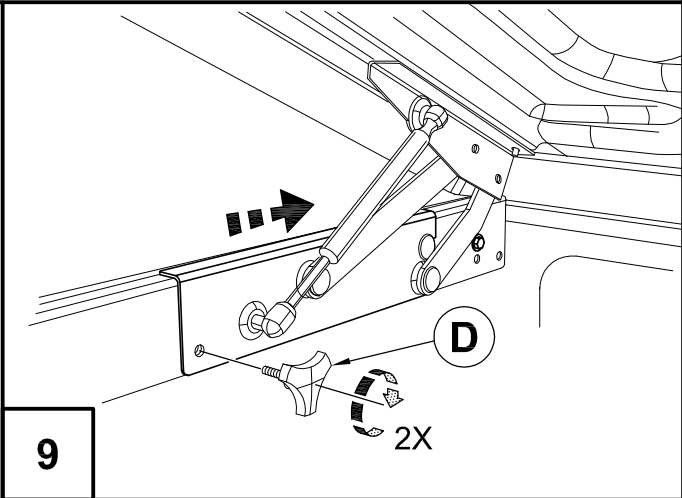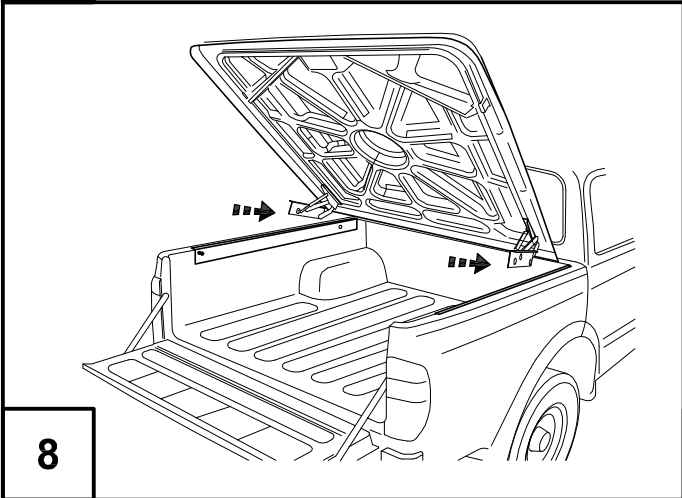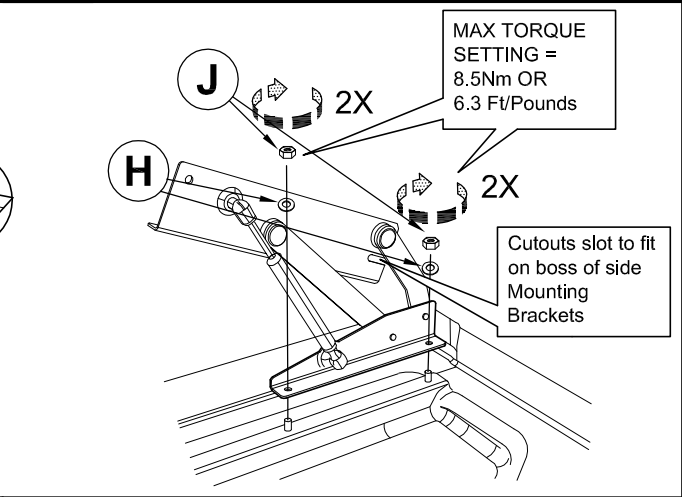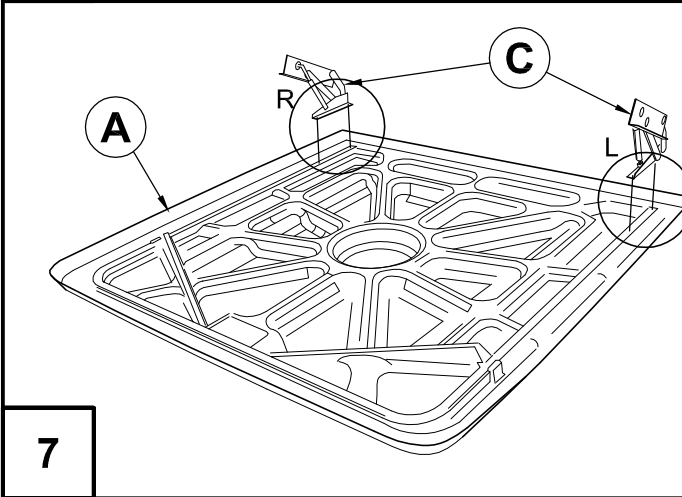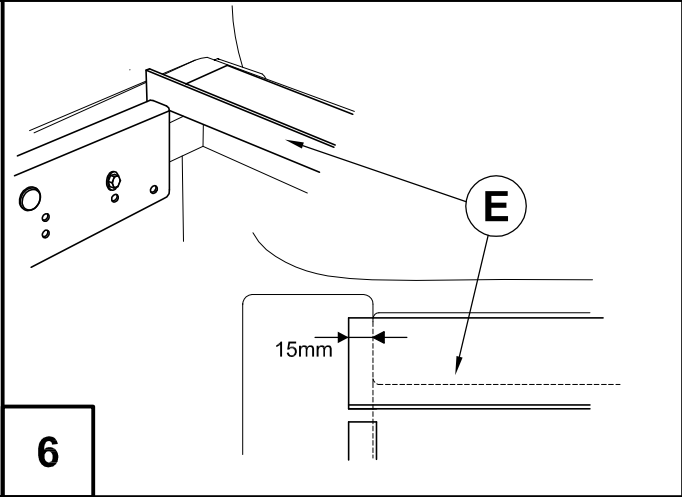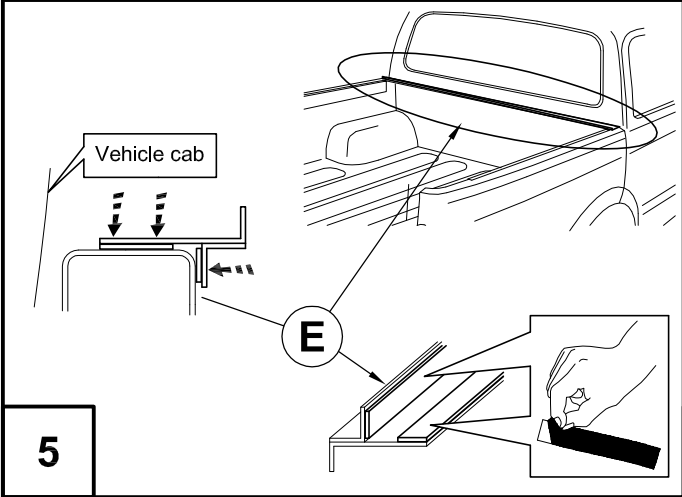

Fitting Kit Number	Manufacturer	Model Type	Year	Customer	Cab Size	SL1 or SL2	Revision	Date	Page
IDFK122	Volkswagen	Amarok	2010	GENERAL USE	DC	SL1	2	01-02-11	2 of 2