


INSTALLATION PROCEDURE

2D.0071.RK Camera relocate kit for RIVAL front bumper Toyota Hilux (2021-) 2D.5722.1 + fittings

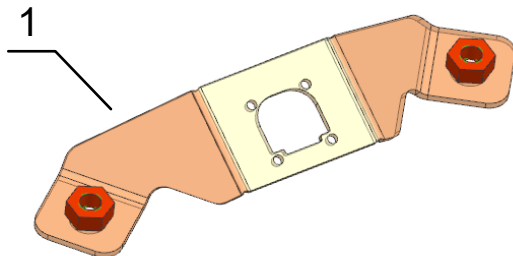

1. Camera bracket.....Qty 1
2. Template.....Qty 1

- A. Screw M6x20.....Qty 2
B. Washer 6.....Qty 2

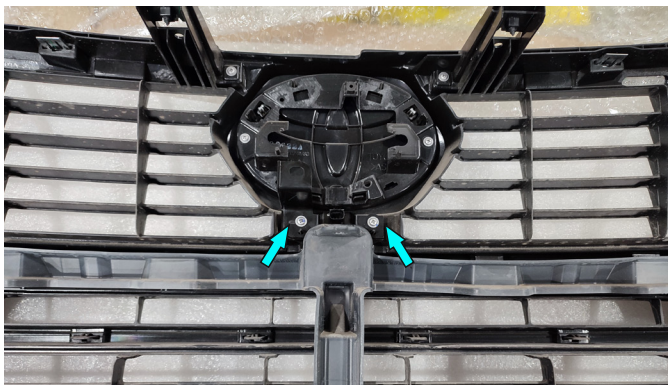


Fig. 1

1. Disconnect camera connector and remove OE camera bracket.

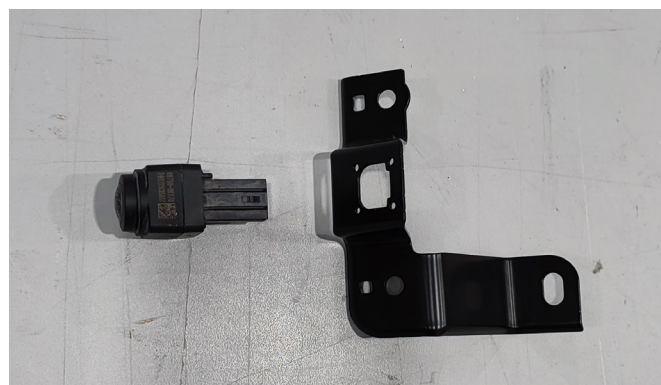


Fig. 2

2. Remove camera from OE bracket.



Fig. 3

3. Remove grille from RIVAL bumper.

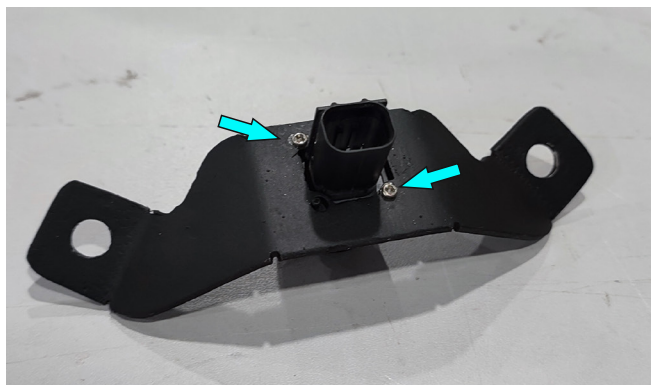


Fig. 4

4. Fix camera to bracket (item 1) using OE screws.

INSTALLATION PROCEDURE

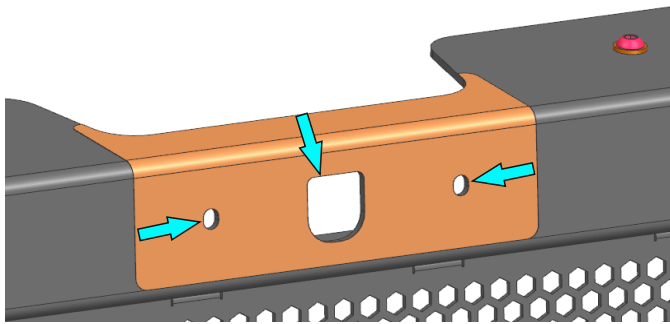


Fig. 5

4. Stick template (item 2), mark holes and drill RIVAL grille.

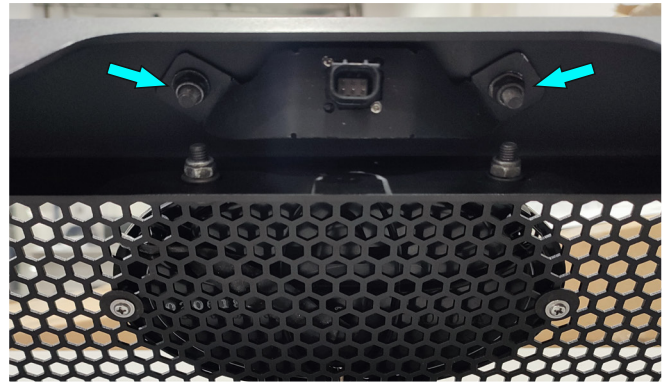


Fig. 6

5. Fix bracket with camera on RIVAL grille using screws M6x20 and washers 6 (item A, B).

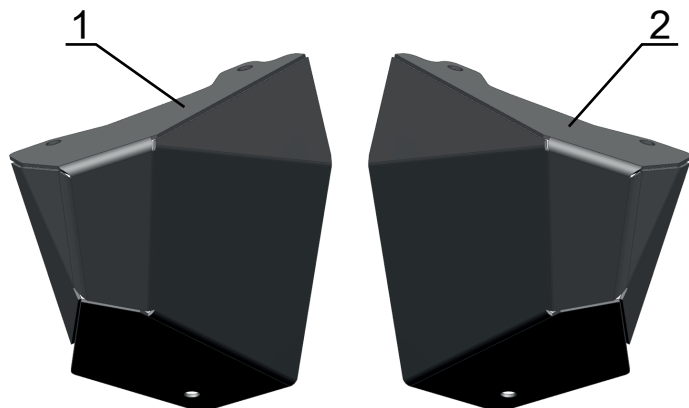


Fig. 7


6. Fix grille and connect camera.

INSTALLATION PROCEDURE

2D.0074.RK 68mm Front bumper fender flare kit for Toyota Hilux (2021-) 2D.5722.1 + fitting kit



1. Right fender flare.....Qty 1
2. Left fender flare.....Qty 1



- A. Bolt M6x16.....Qty 6
B. Nut M6.....Qty 6
C. Weatherstrip.....Qty 2

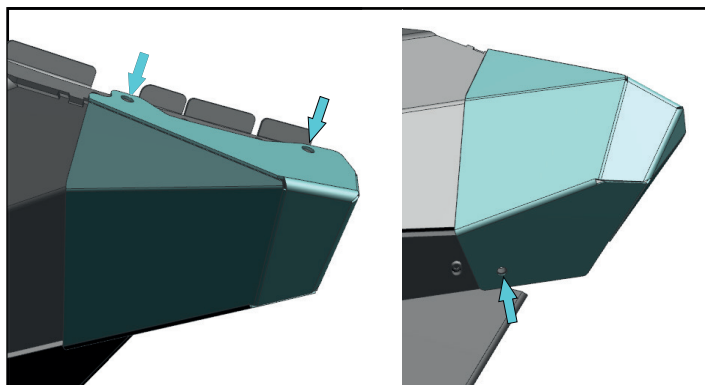


Fig. 1

1. After the step 36 of RIVAL bumper installation manual (page 13), install the left fender flare (item 2) on the left side of the bumper. Mark the center of the holes, as shown in fig.1.

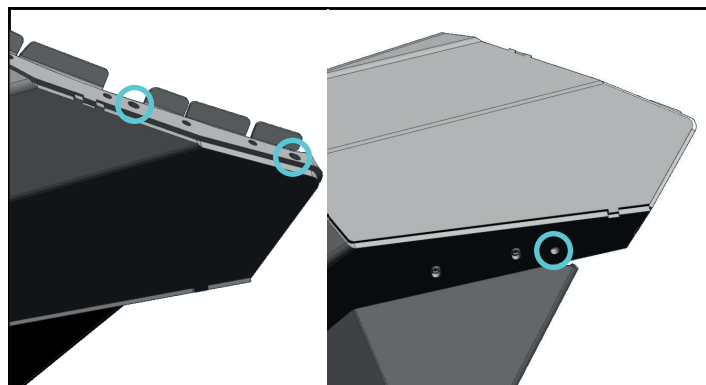


Fig. 2

2. Remove the left fender flare (item 2) and drill holes using a 6mm hole saw (fig.2).

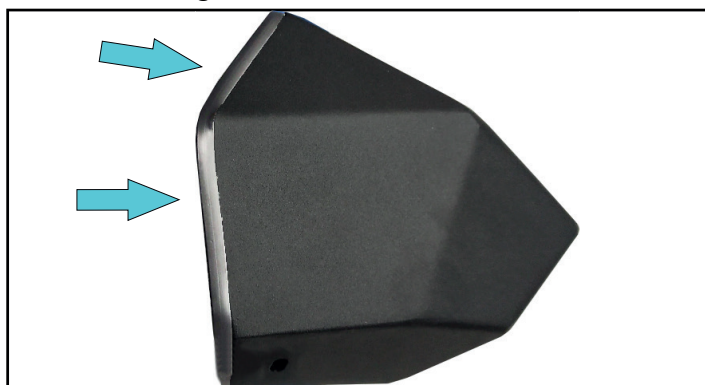


Fig. 3

3. Glue the weatherstrip (item C) to the left fender flare (item 2), as shown in fig.3.

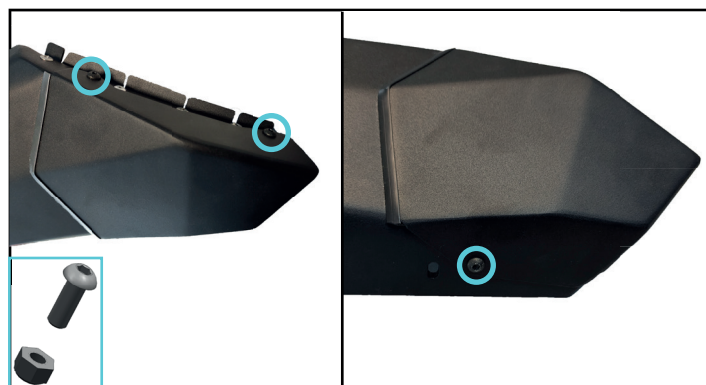


Fig. 4

4. Install the left fender flare (item 2) on the left side of the bumper and fix it using bolts M6x16 (item A) and nuts M6 (item B).

***Tighten hardware after that.**

Do the same on the other side.